
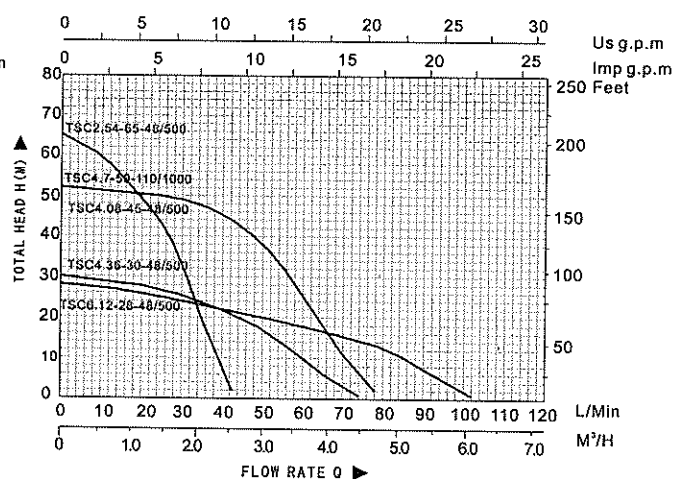
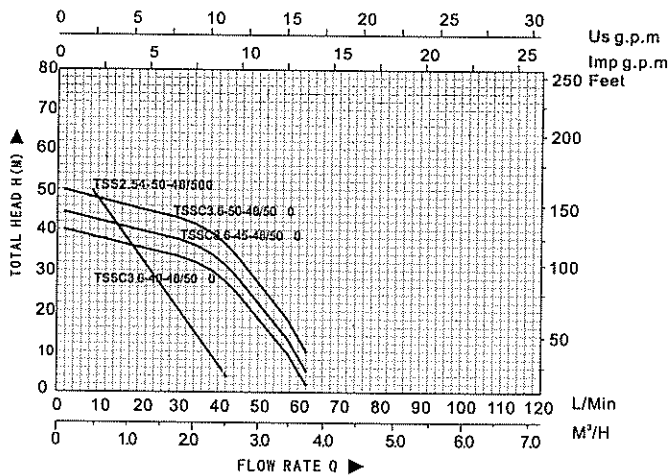
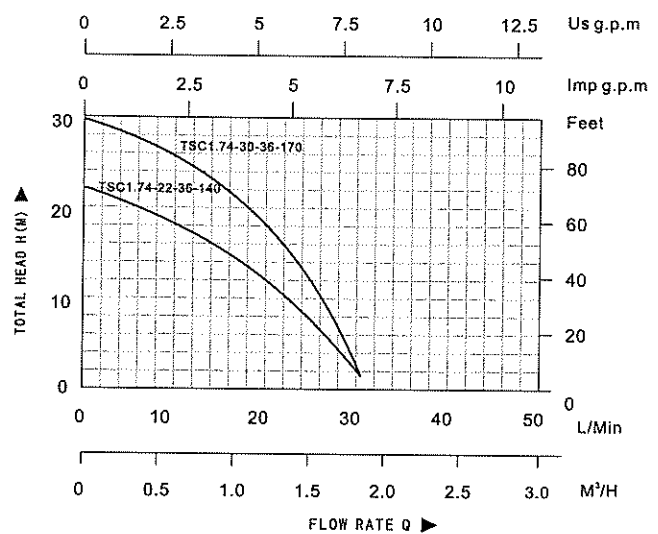
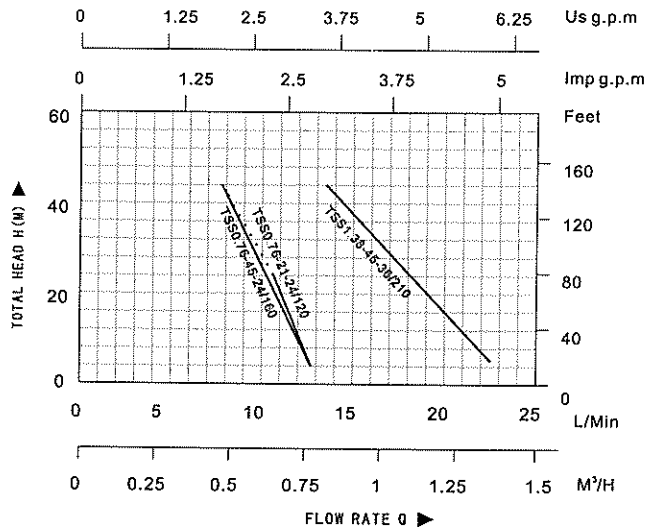
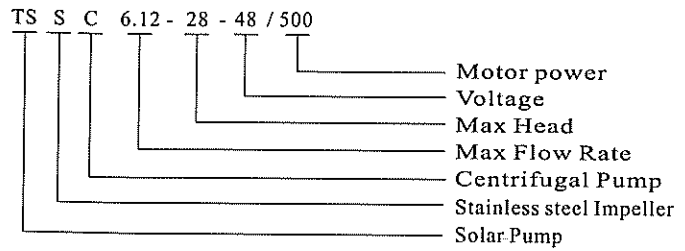


1. MODEL INSTRUCTION

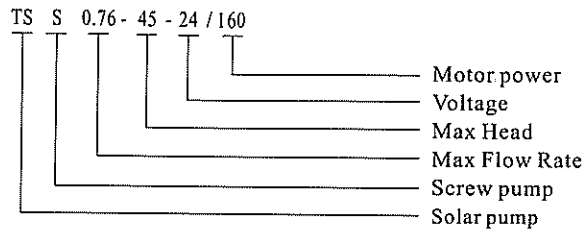

2. PUMP PERFORMANCE:

TYPE	Voltage (V)DC	Power (W)	Flow rate (m³/h)	Head (m)	Outlet size (mm)	Diameter (mm)
TSS0.76-21-24/120	24	120	0.76	21	25	76
TSS0.76-45-24/160	24	160	0.76	45	25	76
TSS1.38-45-36/210	36	210	1.38	45	25	76
TSC1.74-22-36/140	36	140	1.74	22	25	76
TSC1.74-30-36/170	36	170	1.74	30	25	76
TSC6.12-28-48/500	48	500	6.12	28	40	100
TSC4.36-30-48/500	48	500	4.36	30	40	100
TSC4.08-45-48/500	48	500	4.08	45	30	100
TSC2.54-65-48/500	48	500	2.54	65	30	100
TSS2.54-50-48/500	48	500	2.54	50	30	100
TSS3.6-40-48/500	48	500	3.6	40	40	100
TSS3.6-45-48/500	48	500	3.6	45	40	100
TSS3.6-50-48/500	48	500	3.6	50	40	100